


BF MOD-PLUS MARATHON™ APPLICATOR

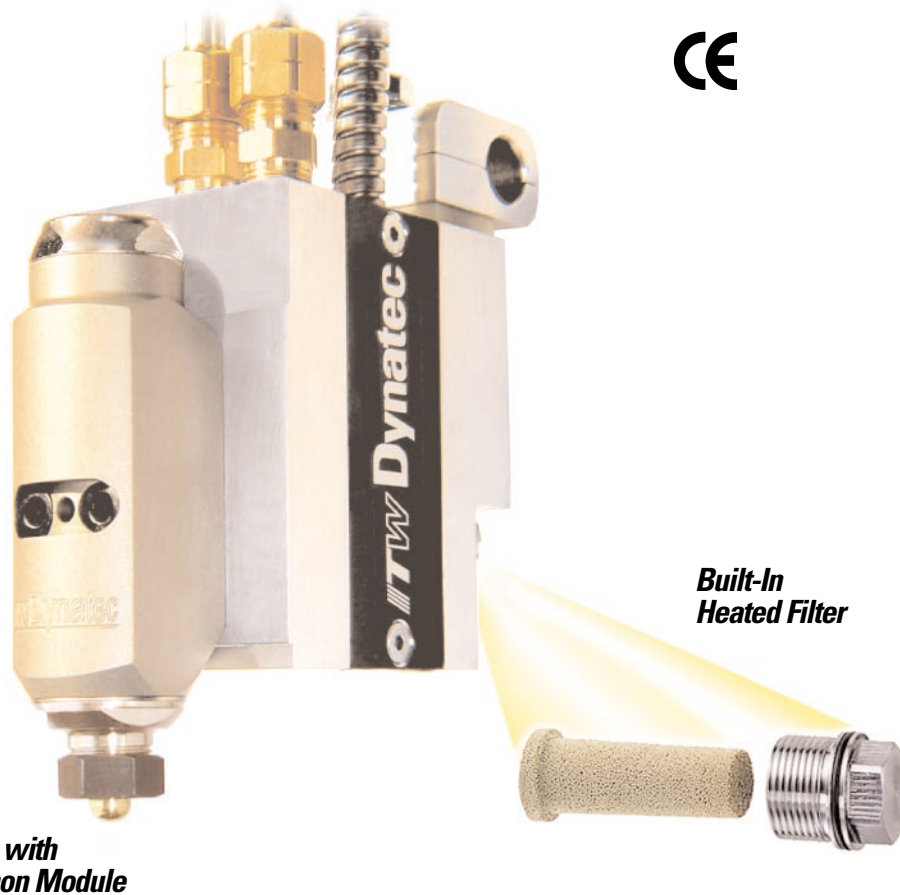

*Shown with
Marathon Module*

*Built-In
Heated Filter*


The Dynatec Advantage

- ***High Speed Adhesive Valve for Precise Adhesive Placement***
- ***Internal Heated Filter Virtually Eliminates Plugged Nozzles ... and Filter Change Doesn't Require Hose Removal***
- ***Durazite™ Seals Provide Extremely Long Operating Life***
- ***Duty Cycle Exceeds Current Technology Five Fold***
- ***Air Open/Air Closed Design Provides Uniform Adhesive Patterns***

TW Dynatec™

Adhesive Application Solutions

BF MOD-PLUS™ APPLICATOR SPECIFICATIONS

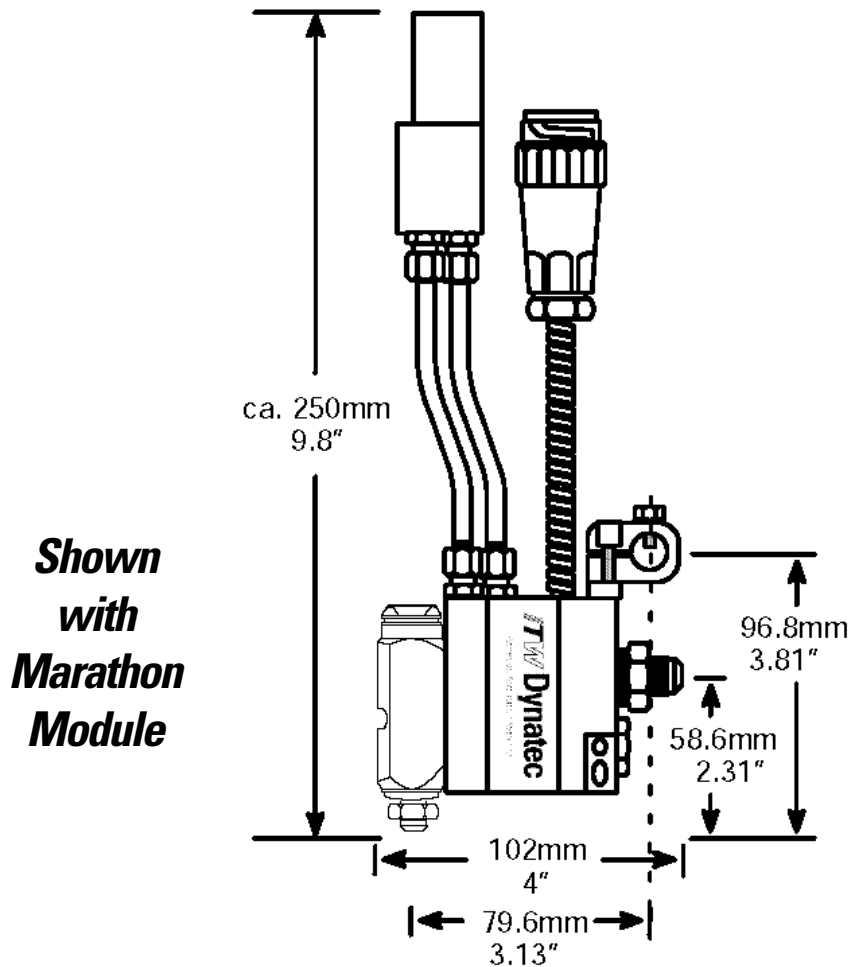

- **Maximum operating temperature 200°C / 390°F**
- **Adhesive viscosity 100 cps min / 20,000 cps max**
- **Pneumatic pressure 74 psi (5 bar) min / 125 psi (9 bar) max**
- **Maximum on/off cycle speed 5,000 cycles per minute**
- **Adhesive pressure 100 psi (7 bar) min / 1,000 psi (68 bar) max**

Note: Specifications are based on 1,000 cps adhesive.

ITW Dynatec™

Adhesive Application Solutions



AMERICAS
ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615•824•3634
1•800•860•6150
Fax 615•264•5248

ASIA and PACIFIC
ITW Dynatec K.K.
Daiwashinagawa Bldg.,
7-15, Konan, 3-Chome
Minato-Ku, Tokyo 108-0075 Japan
Telephone 81•3•3450•5901
Fax 81•3•3450•8405

EUROPE, AFRICA and MIDDLE EAST
ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone 49•210•4915•0
Fax 49•210•491•5111
e.mail@ITWDynatec.de

itwdynatec.com