


AS-MKDD LV / KV

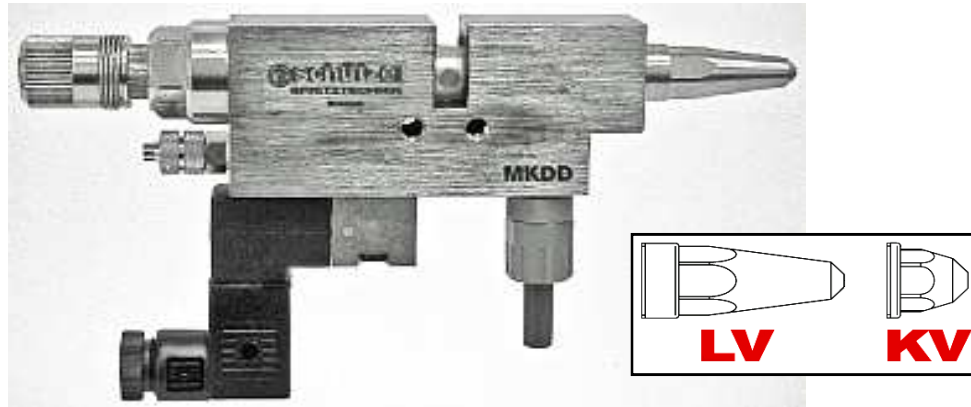

TECHNICAL DATA:

Dimensions - 155(LV)/135(KV) x 80 (with solenoid) x 22 mm

Cycles: up to 40 cycles per second

Material pressure: max. 35 bar

Solenoids: 3/2 - 24 V/DC, 110 V/AC, 230 V/AC

Control air pressure: min. 5-6 bar

Nozzles: long (LV) and short (KV), with adapter different (VD)

Nozzle ϕ : 0,2/0,3/0,4/0,5/0,6/0,7/0,8/1,0/1,2/1,5/2,0/2,5 mm

Weight: 523 gr

Nozzle: stainless steel

Needle: tungsten carbide

Gaskets: viton (other materials on request)

These valves are suitable for the application of glues, adhesives, oils and sealing compounds.