



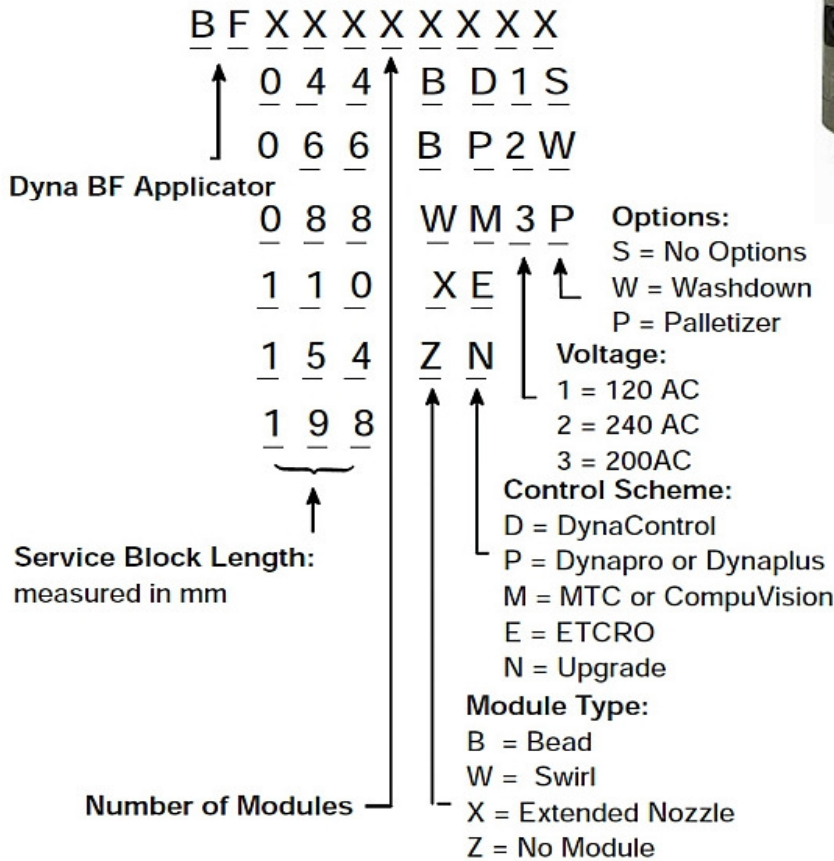

DYNA BF® Application Head

- Max operating temp. 200°C
- Pneumatic pressure 5 bar/min
9 bar/max
- Adhesive pressure 7 bar/min
68 bar/max
- 5 000 cycles/minute
with 400 series MAC® valve

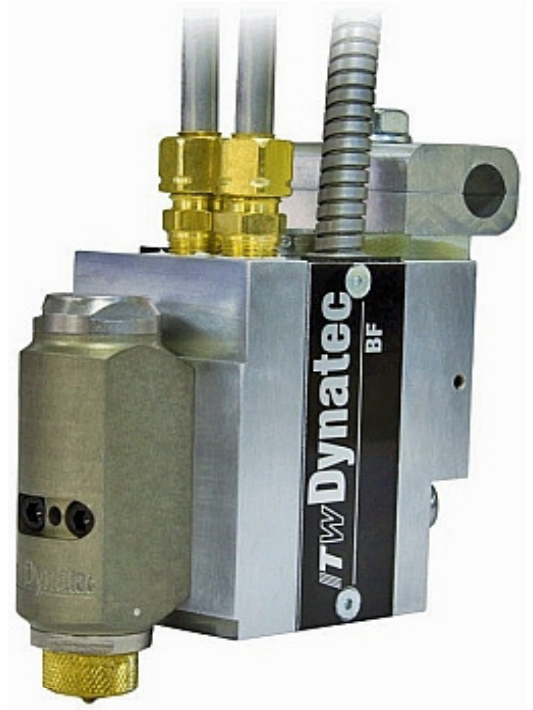

BF Mod-Plus Marathon™

Height (H) - 96 mm
Depth (D) - 81 mm
Width (W) - 44 mm



"Bead & Dot"