


AS-ASV AND ADAPTER (option)

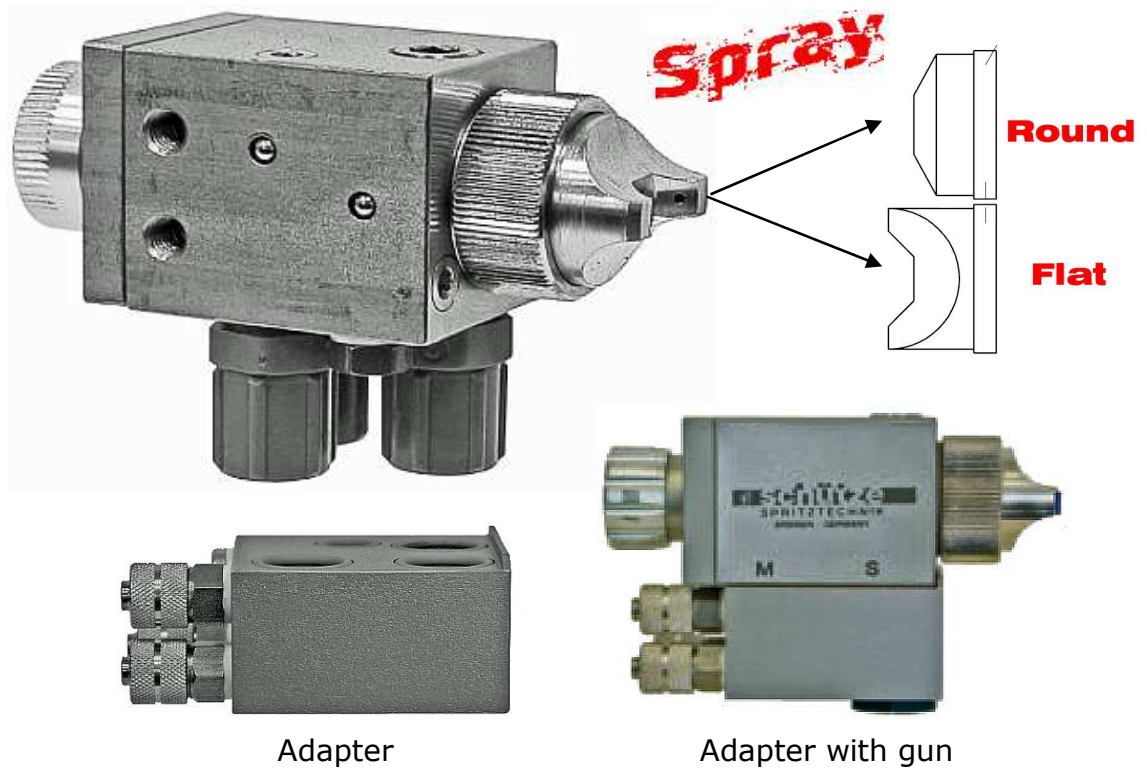

TECHNICAL DATA:

Dimensions - 72.5(Flat)/69(Round) x 50 (without solenoid) x 45 mm

Cycles: up to 40 cycles per second

Material pressure: max. 10 bar

Solenoid - combined system

Control air pressure: min. 5-6 bar

Nozzles: Flat 60° / 90° / Round 15°, stainless steel

Nozzle ϕ : 0,2/0,3/0,5/0,8/1,0/1,2/1,5/2,0/2,5 mm

Weight: 305 gr

Needle: stainless steel

Gaskets: viton (other materials on request)

ASV-valves are suitable for the application of glues, adhesives, oils and sealing compounds.