


DYNAMELT S®

S®-Serie Adhesive Supply Units:

- Memory card
- Adhesive level sensor
- Pendant control panel
- Seven day scheduler
- Pump shut-off valve
- RS232, 485 computer serial
- Patented hopper grid
- Adhesive charring is virtually eliminated
- Faster up-to system ready temperature
- 7 year melt-on-demand hopper warranty
- Accurate nozzle temperature maintained
- Hopper grid melts only the adhesive that is demanded by the application
- Analog or digital adhesive pressure indicator
- Pendant control panel option can be placed up to 30m from the DYNAMELT S® ASU
- Memory card retains important application data
- Easy to use push button controls with multi-lingual digital display
- Display languages: Eng, French, German, Spanish, Swed, Italian, Portug, Japanese
- Energy saving heater duty cycle time
- Typical adhesive melt rate:
 - DM S05 = 10.5 kg/hr
 - DM S10 = 10.7 kg/hr/S10G = 19.1 kg/hr
 - DM S22 = 22.6 kg/hr/S22G = 41.3 kg/hr
 - DM S45 = 23.1 kg/hr/S45G = 45.6 kg/hr
- Adhesive delivery rate, open line:
 - 0.38 kg/min (4.5cc gear pump)
 - 0.91 kg/min (12:1 piston pump)



- Tanks 5- 10- 22- 45 kg
- Number of Hoses 2- 4- 6

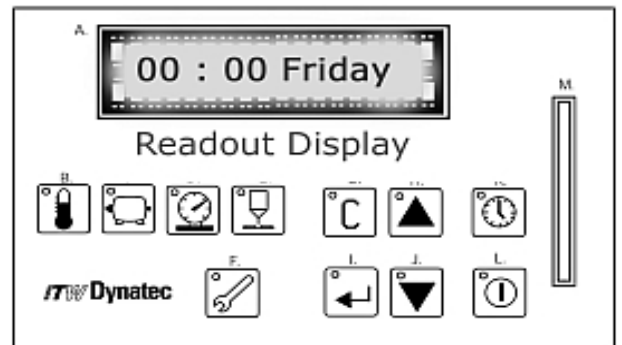


DynaControl® Keypad

...

+



+

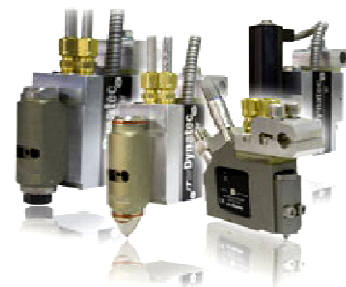

ITW Dynatec



PAKARTE LLC
 Phone +(372) 656 3312
 Mob. +(372) 5656 9482
 pakarte@pakarte.com
 Contact: Kuldar Tamm