


AS-SPRAY-GUN MFS

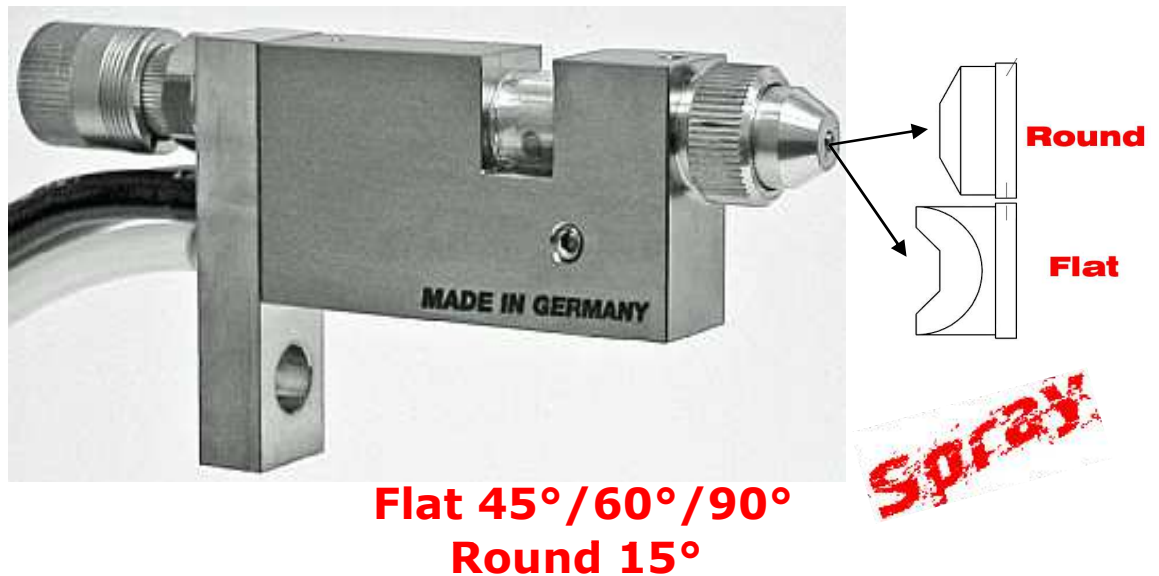

TECHNICAL DATA:

Dimensions - 125.5(Flat)/122(Round) x 35 (without plate) x 22 mm

Cycles: up to 40 cycles per second

Material pressure: max. 6 bar

Solenoid - combined system

Control air pressure: min. 5-6 bar

Nozzles: Flat 60° / 90° / Round 15°, stainless steel

Nozzle \varnothing : 0,2/0,3/0,5/0,8/1,0/1,2/1,5/2,0/2,5 mm

Weight: 470 gr

Needle: stainless steel

Gaskets: viton (other materials on request)

MFS-valves are suitable for the application of glues,
adhesives, oils and sealing compounds.