


AS-SPRAY-MKDD-IS / -S

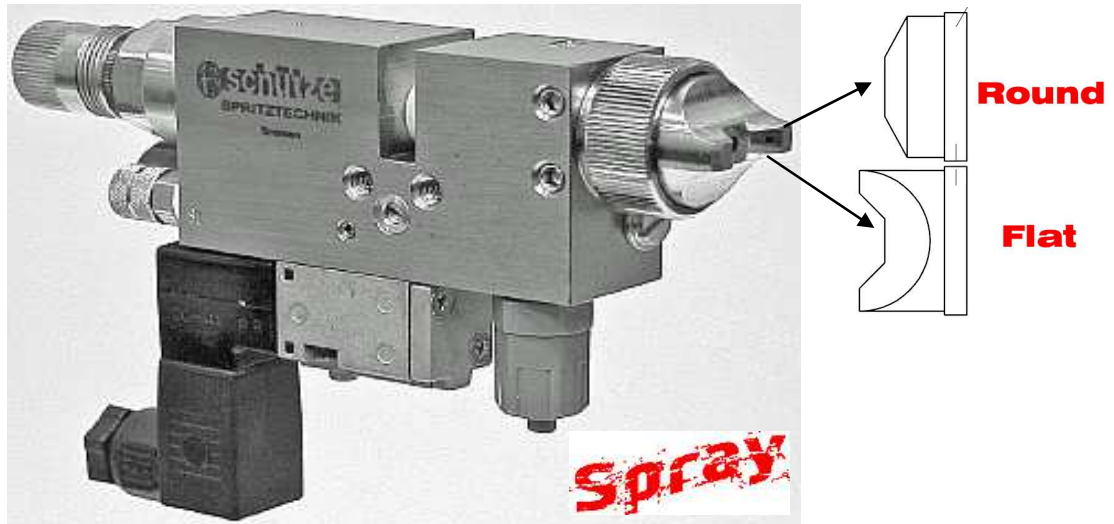

TECHNICAL DATA:

Dimensions - 130(Flat)/127(Round) x 80 (with solenoid) x 22 mm

Cycles: up to 40 cycles per second

Material pressure: max. 35 bar

Solenoids: 5/2 - 24 V/DC, 110 V/AC, 230 V/AC

Control air pressure: min. 5-6 bar

Nozzles: IS = flat- (pic) and S = round, stainless steel

Nozzle \varnothing : 0,3/0,5/0,8/1,0/1,2/1,5/2,0 mm

Weight: 525 gr

Needle: tungsten carbide

Gaskets: viton (other materials on request)

These valves are suitable for the application of glues, adhesives, oils and sealing compounds.